



4X ϕ .140 THRU
EQ. SPACED
ON ϕ 0.630 [16]
BOLT CIRCLE
NO DRAFT


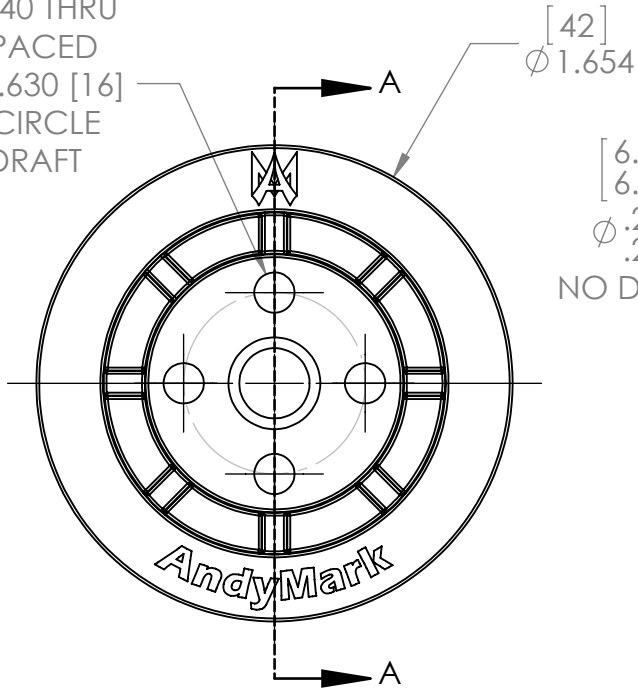


[42]
 ϕ 1.654
[6.3]
[6.1]
 ϕ .248
.240
NO DRAFT

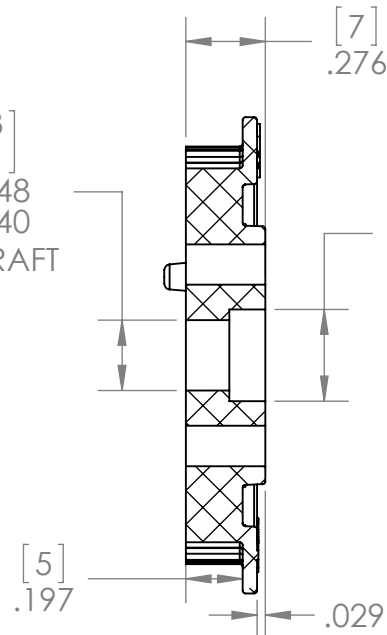

SECTION A-A

[8.2]
[8.1]
 ϕ .323
.319
NO DRAFT

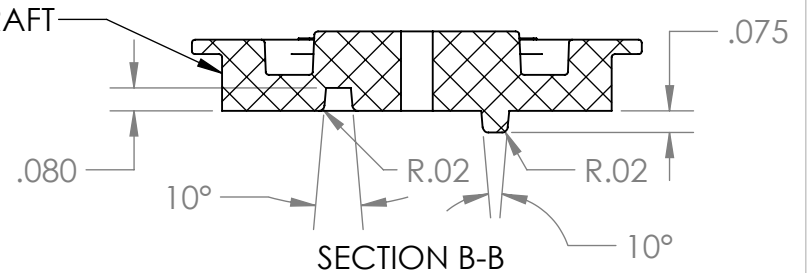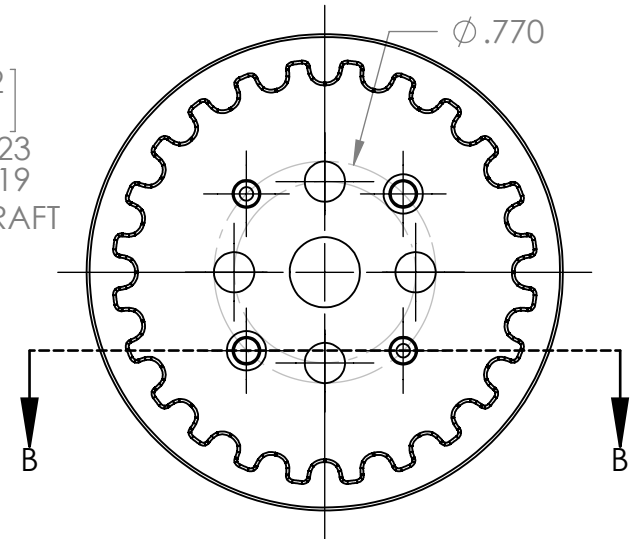

SECTION B-B

PLEASE SEE ADDITIONAL CAD GEOMETRY FOR TOOLPATH INFORMATION



UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: MACH \pm BEND $\pm 5^\circ$
ONE PLACE DECIMAL ± 0.1
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL
POLYCARBONATE

FINISH
DEBURRED

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	NL	5/25/16
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:
ALL RADS R0.01" UNLESS OTHERWISE
SPECIFIED
2° DRAFT APPLIED UNLESS OTHERWISE
NOTED



TITLE:

24T HTD PULLEY HALF
6MM BORE

SIZE	DWG. NO.	REV
A	am-3401	1

SCALE: 1.5:1 WEIGHT:

SHEET 1 OF 1