
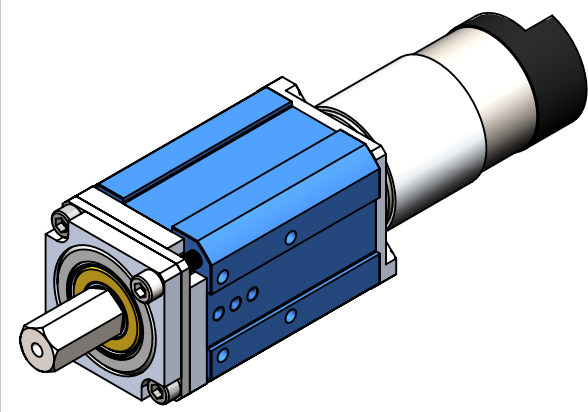
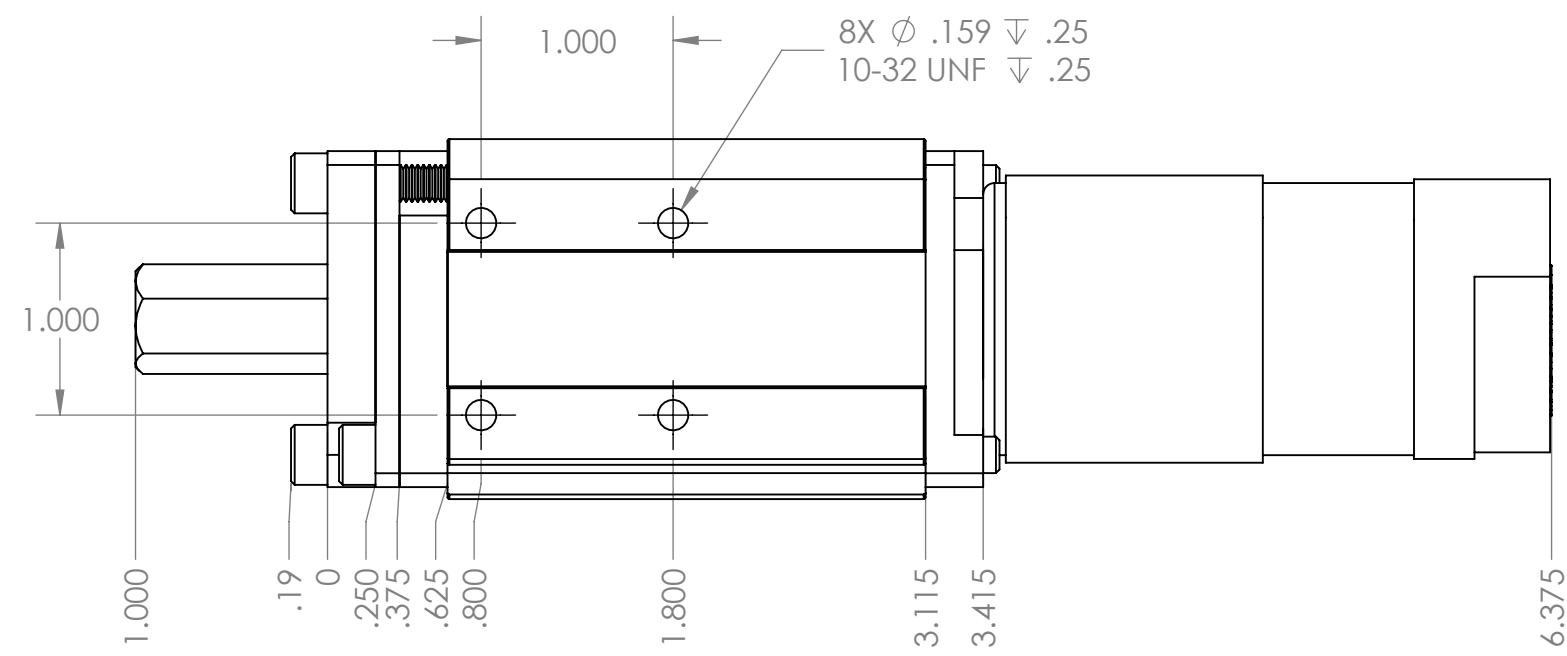
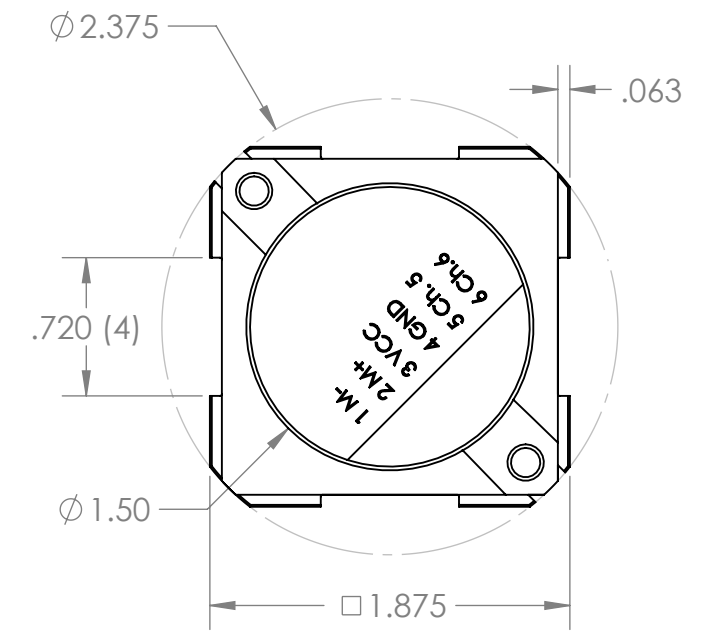
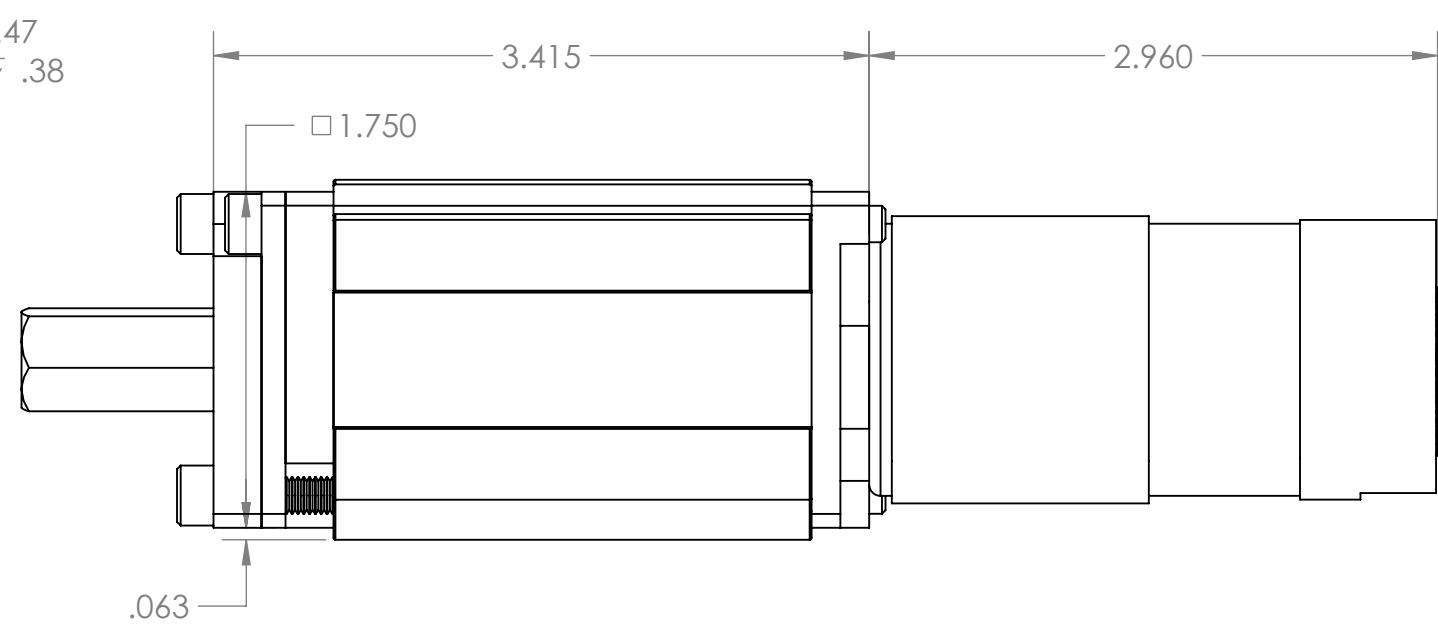


REVISION HISTORY			
REV.	DESCRIPTION	DATE	DRAWN BY
1	ORIGINAL PRINT	3/31/2020	N. LAWRENCE

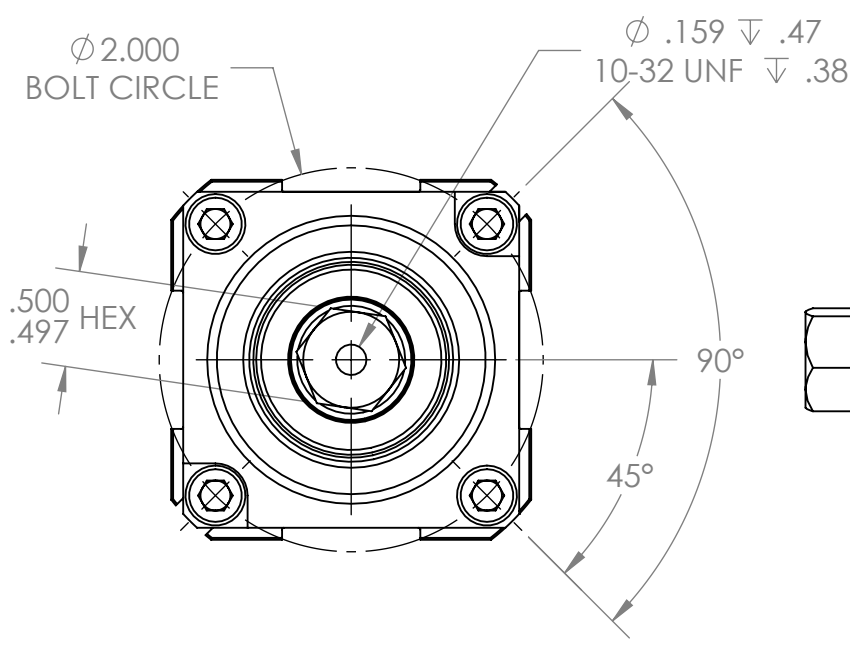

*** SEE CAD FOR ADDITIONAL TOOLPATH INFO***

MEASURED SPECIFICATIONS	
INPUT VOLTAGE	12V DC
OUTPUT SPEED	30 RPM
STALL TORQUE	30 FT-LBS
FREE CURRENT	2A
STALL CURRENT	10A

UNLESS OTHERWISE SPECIFIED:		COMMENTS:	
DIMENSIONS ARE IN INCHES		DUAL DIMENSIONS ARE IN MILLIMETERS.	
TOLERANCES:		BREAK ALL SHARP EDGES.	
FRACTIONAL	±1/16	CHECKED	NAME
ANGULAR: MACH	±1°	ENG APPR.	NM
ANGULAR: BEND	±5°	MFG APPR.	
ONE PLACE DECIMAL	±0.1	Q.A.	
TWO PLACE DECIMAL	±0.01		
THREE PLACE DECIMAL	±0.005		
FOUR PLACE DECIMAL	±0.0005		
MATERIAL	GEARMOTOR	DATE	3/31/20
FINISH	ASSEMBLED	SIZE	B
DO NOT SCALE DRAWING		DWG. NO.	am-4252

AndyMark

TITLE: 12V 192:1 DC GEARMOTOR WITH 500HEX SHAFT

SCALE: 1:1 SHEET 1 OF 1

4

3

2

1

4

3

2

1

B

B

A

A