





4

3

2


1

WHEN (+) VOLTAGE AT RED WIRE

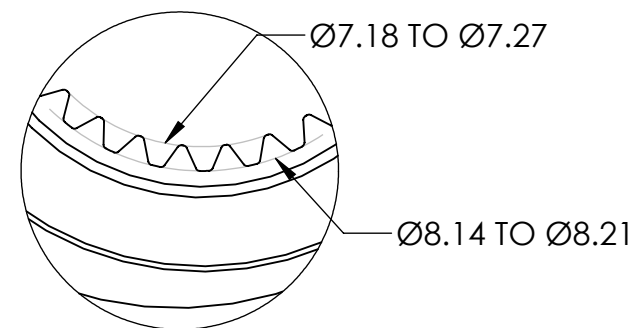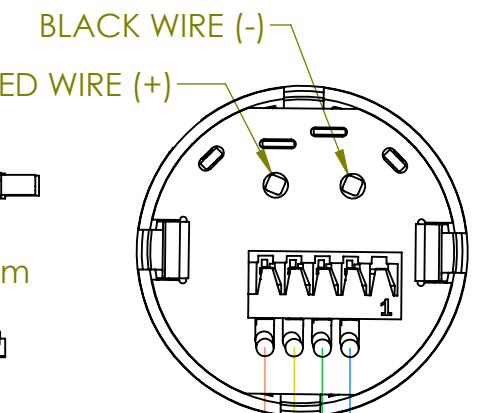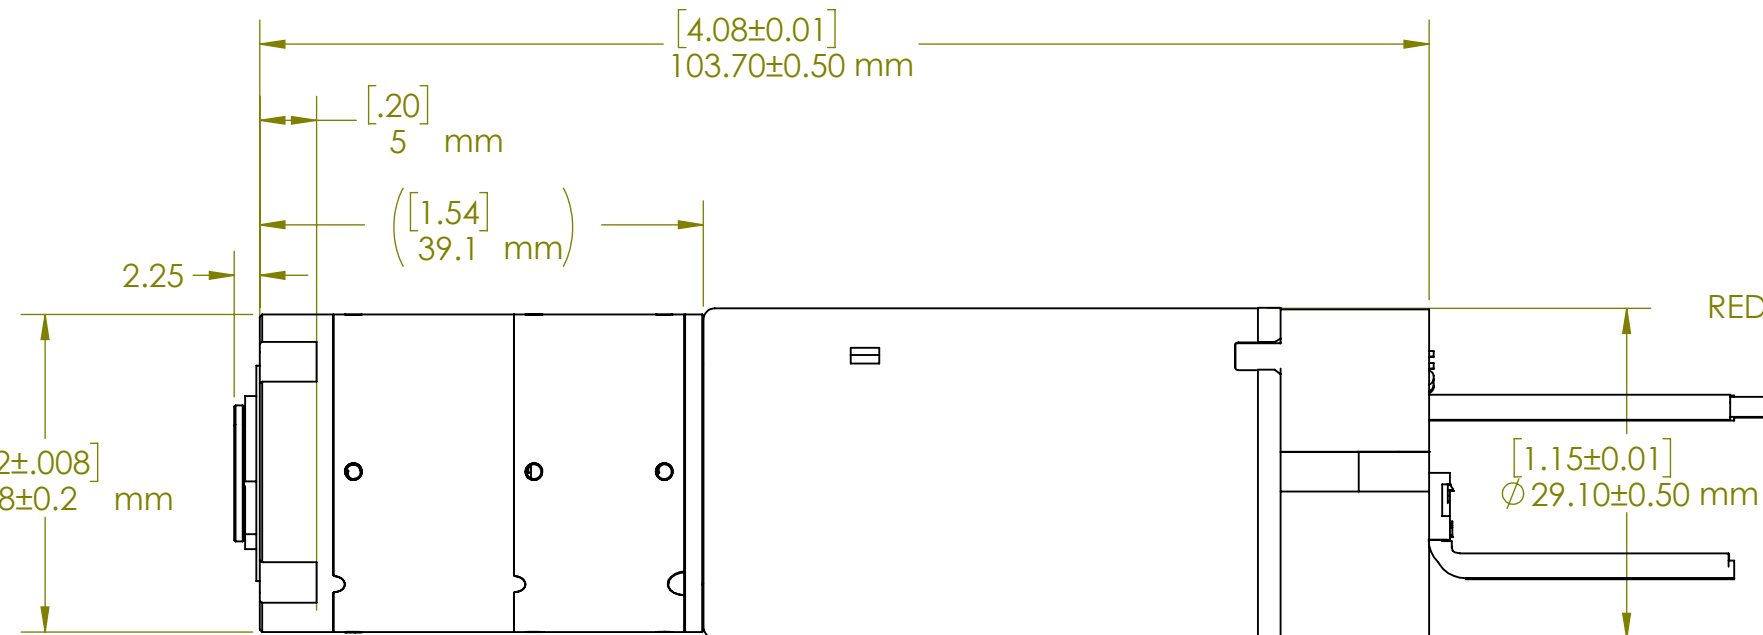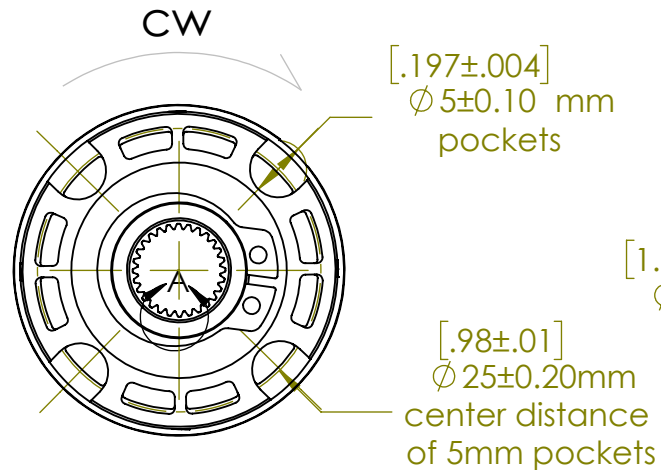


DIN 5481-7x8(z=28)
DETAIL A
SCALE 7 : 1

ONE MOTOR ROTATION
Note: Gear reduction is 22.2:1 so...
one output rotation is 44.4 pulses

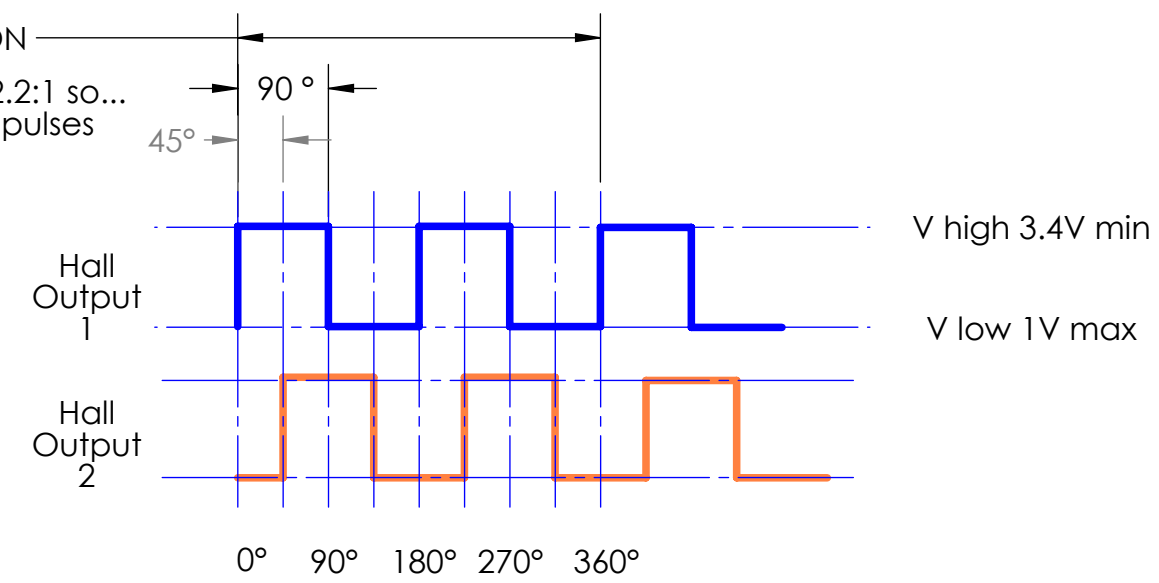

Direction CW if Hall Output 1 rises before Hall Output 2

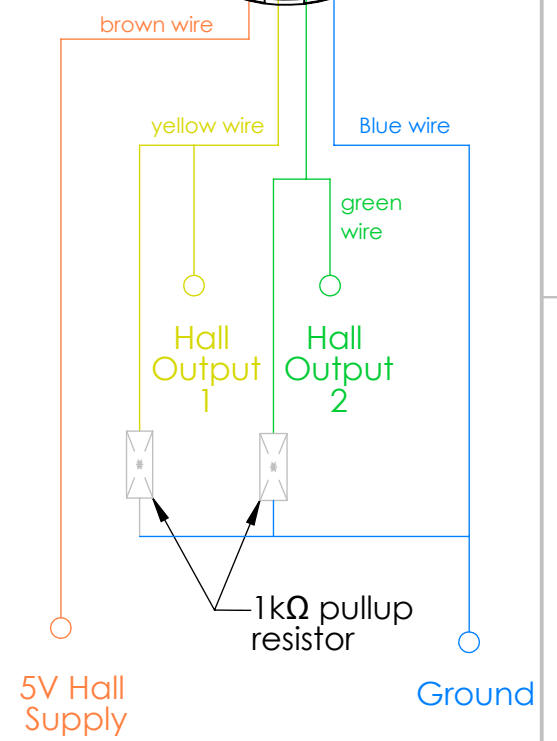

A

Rated Voltage	12V	
Performance with Gear box at RT	N/L speed	410 +/- 49rpm
	N/L current	2A max
	Stall Torque	3.8 - 5Nm [2.8ft-lbs-3.7ft-lbs]
	Stall current	26A
General details	Gearbox ratio	22.2:1
	Gearing	Planetary 2 stage
	Weight	0.27 Kg [0.6 lbs]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN mm[in]		DRAWN	
TOLERANCES:		CHECKED	
FRACTIONAL ±		ENG APPR.	
ANGULAR: MACH ± BEND ±		MFG APPR.	
TWO PLACE DECIMAL ±		Q.A.	
THREE PLACE DECIMAL ±		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:	MATERIAL		
FINISH			
NEXT ASSY	USED ON		
APPLICATION	DO NOT SCALE DRAWING		



TITLE:
PLG motor for FRC

SIZE	DWG. NO.	REV
B	JE-PLG-149	1
SCALE: 1:1.5WEIGHT:		SHEET 1 OF 1

4

3

2

1

A